


J1
Fits in U1 socket of ASCII Keyboard Tester

This Hex Display can be connected to the ASCII Keyboard Tester. Therefore J1 is inserted in the U1 socket of the ASCII Keyboard Tester.

The 74LS374 IC at position U1 is removed from the Keyboard Tester board and can be placed on this board.

This Hex Display can be used stand-alone by using these connectors. Do not connect these when connected to the ASCII Keyboard Tester by use of J1.

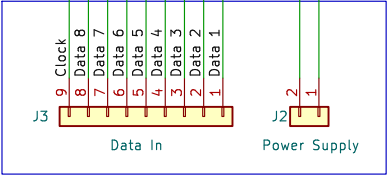

8BitFlux.com / Bobby Nijssen

Sheet: /
File: HexDisplay.kicad_sch

Title: One Byte Hex Display

Size: A4	Date: 2023-09-05	Rev: 1
KiCad E.D.A. kicad 7.0.5-0		Id: 1/1